

A50E

Digital Day & Night Vision Scope



HIKMICRO ALPEX 4K A50E Digital Day & Night Vision Scope kan præstere under alle omgivende lysforhold. Den har en avanceret 3840×2160 UHD-detektor, 50 mm linse og 1920×1080 0.49" sub-round OLED-skærm, der giver fuld farveklarhed om dagen og klassisk sort-hvid visning om natten. Det traditionelle 30 mm rørdesign opfylder behovene hos professionelle jægere, der værdsætter traditioner og søger teknologisk overlegenhed. Sigtekornet er velegnet til både mark- og skovjagt.

Nøgle egenskaber

- - 3840×2160 opløsning CMOS-detektor
- - 50 mm linse med justerbar blænde fra F1.2 til 2.5
- - 1920×1080 opløsning 0.49-tommers sub-round OLED-skærm
- - Understøtter Dag/Nat-tilstand
- - Understøtter rekylaktiveret optagelse med lyd, indbygget EMMC (64 GB)
- - Op til 11 timers kontinuerlig drift
- - Udskifteligt og genopladeligt batteri

Specification


Main	
Max. Resolution	3840 × 2160
Frame Rate	50 Hz
Lens (Focal Length)	50 mm, F1.2 to 2.5 Adjustable Aperture
Detection Range	Day: 1000 m
Min. Focusing Distance	10 m
Magnification	3.5x to 28.0x (8x) Support Continuous Zooming
Field of View	8.8° × 5.0°/15.3 m × 8.6 m @100 m
Image Display	
Display	1920 × 1080, 0.49 inch, OLED
Image Mode	Day, Night
Exit Pupil	6 mm
Eye Relief	55 mm
Diopter (Range)	-5 D to 5 D
System	
Record Video	On-board Video Recording
Record Video Resolution	1920 × 1080
Capture Snapshot	Yes
Audio Recording	Yes
Recoil-activation Recording	Yes
Standby Mode	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Freeze Zeroing	Yes
Distance Measurement	NA
Zeroing Profiles	5
Max. Recoil	1000 g/0.4 ms
Hotspot	Yes
Ballistic Calculation	NA
Power Supply	
Battery Type	Two Rechargeable Lithium Batteries (Internal), One Replaceable and Rechargeable 18650 Battery (External)
Battery Operating Time	11 hours of Continuous Running (@25°C, Hotspot off)
Power Supply	5 VDC/2 A, USB Type-C Interface
General	
Mounting	Standard 30 mm
Protection Level	IP67

Working Temperature	-30°C to 55°C (-22°F to 131°F)
Dimension	439.8 mm × 71.4 mm × 84.0 mm
Weight	1080 g without External Battery
Laser Rangefinder	
Safety Class for Laser	NA
Wavelength	NA
Max. Measuring Range	NA
Measurement Accuracy	NA
Min. Measuring Range	NA


▪ Available Model

HM-TR3F-50S2/WV-A50E

▪ Dimension

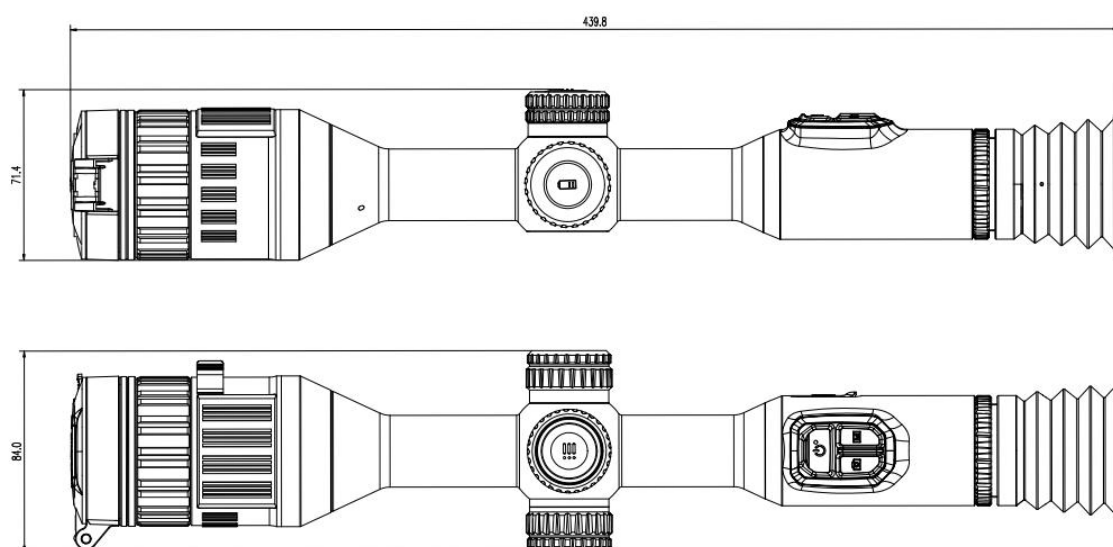

▪ Accessories

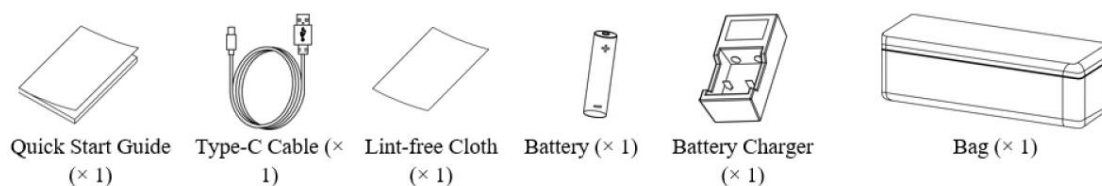



HIKMICRO SIGHT



HIKMICRO Outdoor hikmicro_outdoor HIKMICRO Outdoor HIKMICRO info@hikmicrotech.com <http://hikmicrotech.com/en>

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang
@hangzhou microimage software co.,Ltd .2020 | data subject to change without notice!